


**Adjustable Tee**

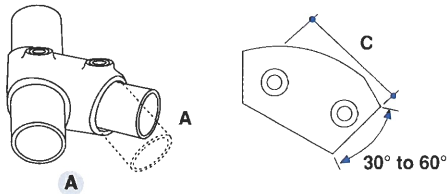

Freely adjustable tee between 30° and 60°. Typical use is a tee connection on angled top rails on steeper slopes or stairs with the upright remaining vertical. This fitting can also be used for bracing on structures. This fitting has no ability to join tubes. An alternative for this situation is the Pipeclamp fitting 127.

PIPECLAMP REF No.	A	B	C	D	E	F	G	HOLE DIA MM	WEIGHT KGS
129-2	2		86						0.44
129-3	3		90						0.64
129-4	4		105						0.97